

## Dual Digital Transistors (NPN+PNP)


### FEATURES

- DTA114E and DTC114E transistors are built-in a package
- Ideal for power switch circuits
- Mounting cost and area can be cut in half

### MARKING: C3

#### NPN DTC114E Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	$V_{CC}$	50	V
Input voltage	$V_{IN}$	-10~+40	V
Output current	$I_O$	50	mA
	$I_{CM}$	100	
Power dissipation	$P_D$	150	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55~150	°C

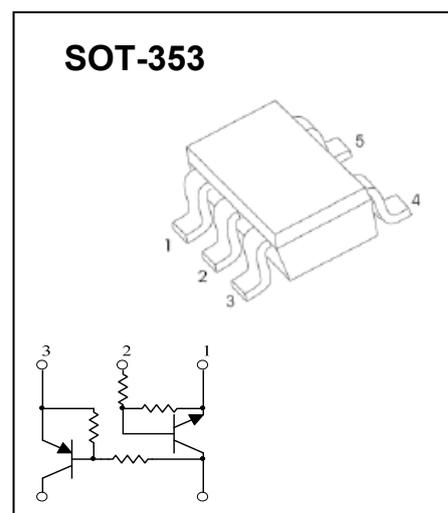

#### Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Input voltage	$V_{I(off)}$	0.5			V	$V_{CC}=5V, I_O=100\mu A$
	$V_{I(on)}$			3		$V_O=0.3V, I_O=10mA$
Output voltage	$V_{O(on)}$			0.3	V	$I_O/I_I=10mA/0.5mA$
Input current	$I_I$			0.88	mA	$V_I=5V$
Output current	$I_{O(off)}$			0.5	$\mu A$	$V_{CC}=50V, V_I=0$
DC current gain	$G_I$	30				$V_O=5V, I_O=5mA$
Input resistance	$R_1$	7	10	13	k $\Omega$	
Resistance ratio	$R_2/R_1$	0.8	1	1.2		
Transition frequency	$f_T$		250		MHz	$V_{CE}=10V, I_E=-5mA, f=100MHz$


#### PNP DTA114E Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	$V_{CC}$	-50	V
Input voltage	$V_{IN}$	-40~+10	V
Output current	$I_O$	-50	mA
	$I_{CM}$	-100	
Power dissipation	$P_D$	150	mW
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55~150	°C


#### Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Input voltage	$V_{I(off)}$	-0.5			V	$V_{CC}=-5V, I_O=-100\mu A$
	$V_{I(on)}$			-3		$V_O=-0.3V, I_O=-10mA$
Output voltage	$V_{O(on)}$			-0.3	V	$I_O/I_I=-10mA/-0.5mA$
Input current	$I_I$			-0.88	mA	$V_I=-5V$
Output current	$I_{O(off)}$			-0.5	$\mu A$	$V_{CC}=-50V, V_I=0$
DC current gain	$G_I$	30				$V_O=-5V, I_O=-5mA$
Input resistance	$R_1$	7	10	13	k $\Omega$	
Resistance ratio	$R_2/R_1$	0.8	1	1.2		
Transition frequency	$f_T$		250		MHz	$V_{CE}=-10V, I_E=5mA, f=100MHz$


### ON Characteristics

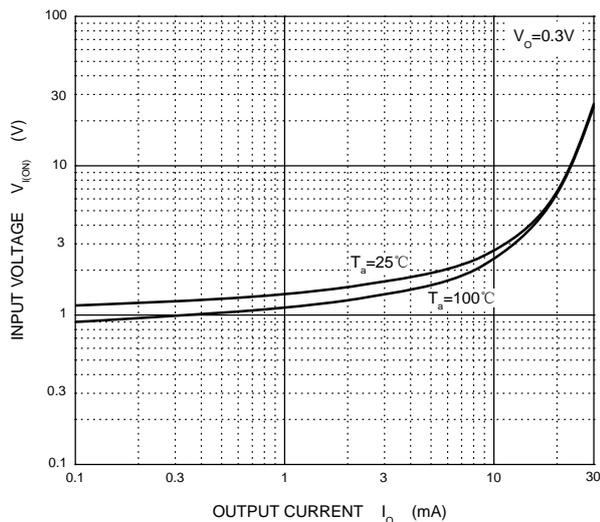


### OFF Characteristics

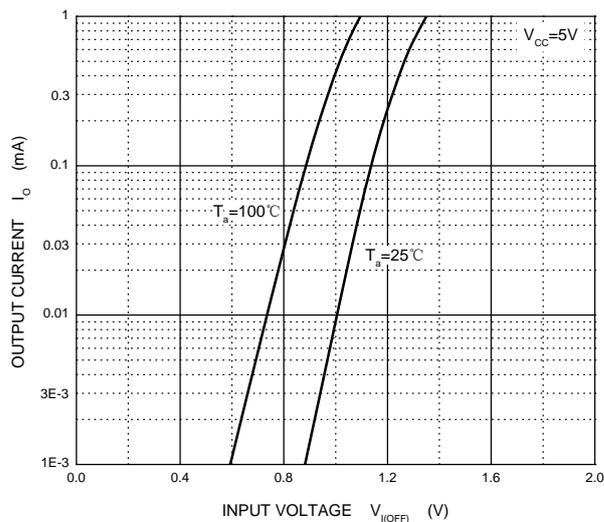


### $V_{O(ON)} - I_O$

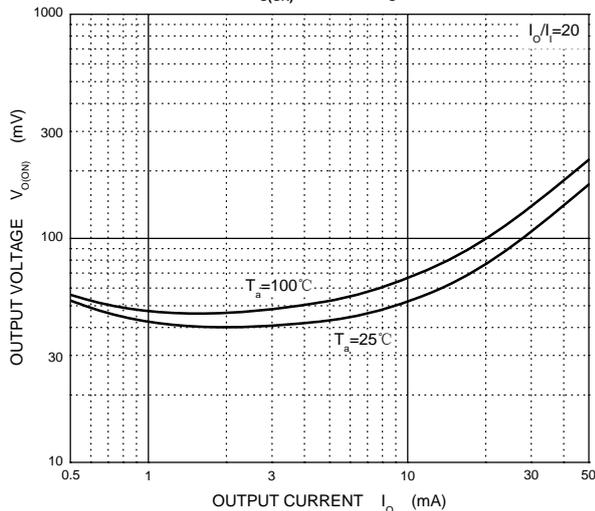

### $G_I - I_O$

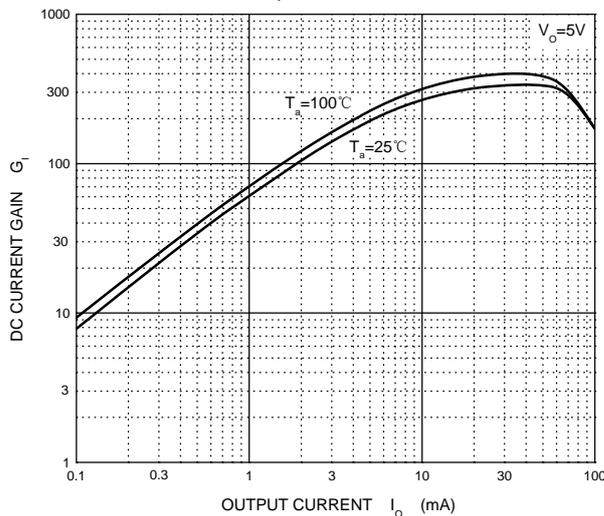

### $C_O - V_R$

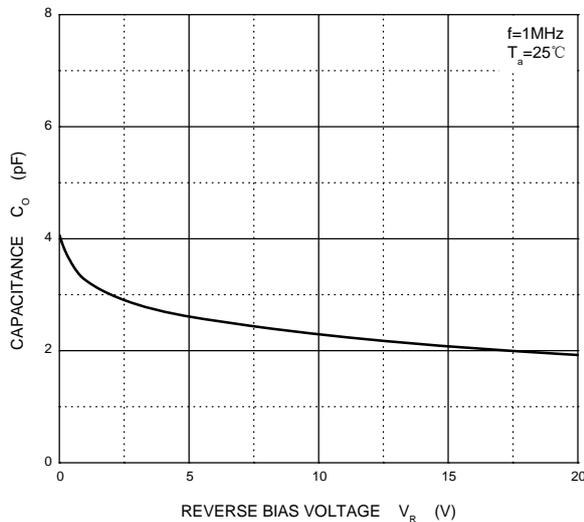

### $P_D - T_a$

