


GENERAL PURPOSE PLASTIC RECTIFIER

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

SOD-123FL

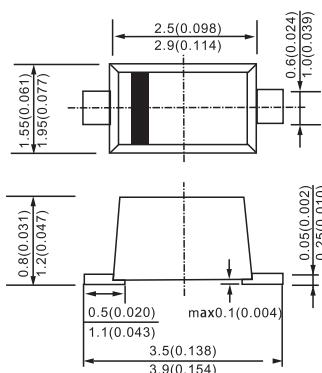

Dimensions in millimeters

MECHANICAL DATA

Case: JEDEC SOD-123 molded plastic body**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026**Polarity:** Color band denotes cathode end**Mounting Position:** Any**Weight:** 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SM 4001PL	SM 4002PL	SM 4003PL	SM 4004PL	SM 4005PL	SM 4006PL	SM 4007PL	UNITS
*Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
*Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
*Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
*Maximum average forward rectified current 0.375" (9.5mm) lead length at T _A =75°C	I _(AV)					1.0			Amp
*Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T _A =75°C	I _{FSM}				30.0				Amps
*Maximum instantaneous forward voltage at 1.0A	V _F				1.1				Volts
*Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at T _L =75°C	I _{R(AV)}				30.0				µA
*Maximum DC reverse current T _A = 25°C at rated DC blocking voltage T _A =100°C	I _R				5.0 50.0				µA
Typical reverse recovery time (NOTE 1)	t _{rr}				30.0				µs
Typical junction capacitance (NOTE 2)	C _J				15.0				pF
Typical thermal resistance (NOTE 3)	R _{θJA} R _{θJL}				50.0 25.0				°C/W
Maximum DC blocking voltage temperature	T _A				+150				°C
*Operating junction and storage temperature range	T _J , T _{STG}				-50 to +175				°C

NOTES:

(1) Measured on Tektronix Type "S" recovery plug-in. Tektronix 545 Scope or equivalent, I_{FM}=20mA, I_{RM}=1mA

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES

SM4001 THRU SM4007

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

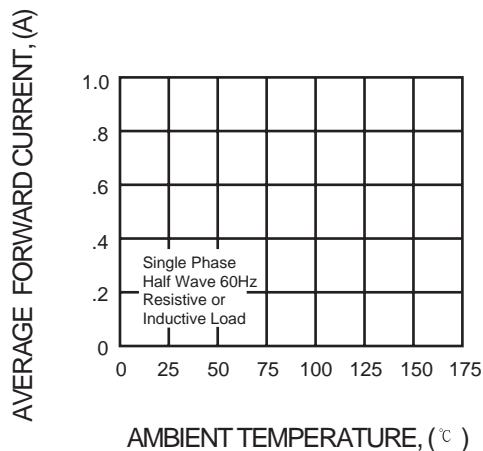


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

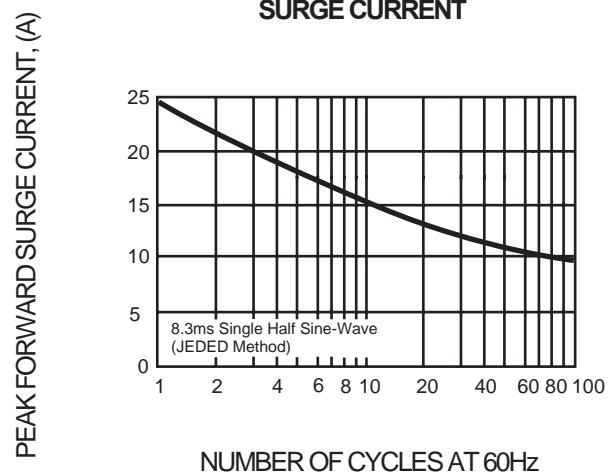


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

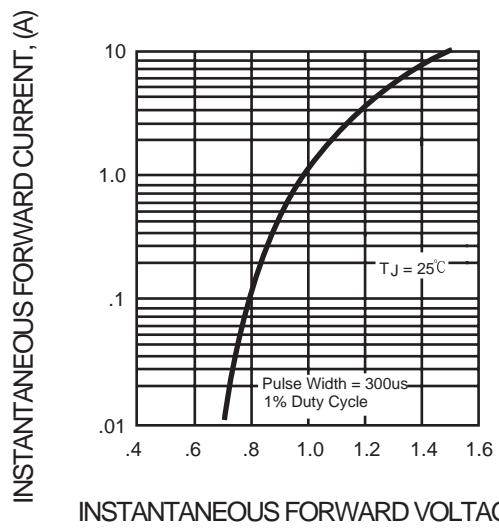


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

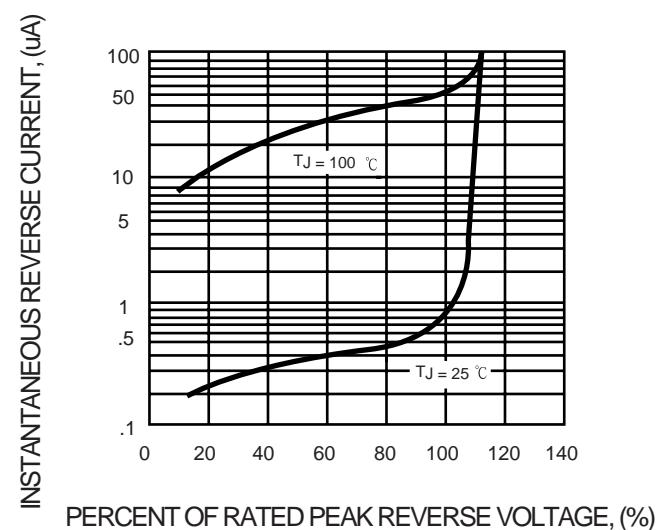


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

