






## SCHOTTKY BARRIER DIODE

### FEATURES

For use in low voltage, high frequency inverters  
Free wheeling, and polarity protection applications

### MARKING:

<b>B5817WS:SJ</b>	<b>B5818WS:SK</b>	<b>B5819WS:SL</b>
- 	- 	- 
- 	- 	- 

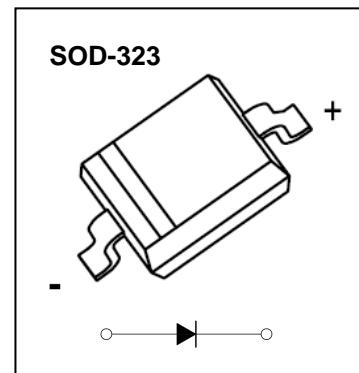

The marking bar indicates the cathode  
Solid dot = Green molding compound device, if none,  
the normal device.





### Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C

Parameter	Symbol	B5817WS	B5818WS	B5819WS	Unit
Non-repetitive peak reverse voltage	V <sub>RM</sub>	20	30	40	V
Peak repetitive peak reverse voltage	V <sub>RRM</sub>				
Working peak reverse voltage	V <sub>RWM</sub>	20	30	40	V
DC blocking voltage	V <sub>R</sub>				
RMS reverse voltage	V <sub>R(RMS)</sub>	14	21	28	V
Average rectified output current	I <sub>O</sub>		1		A
Forward current @ 40°C, "avg"	I <sub>FSM</sub>		9		A
Repetitive peak forward current	I <sub>FRM</sub>		1.5		A
Power dissipation	P <sub>d</sub>		250		mW
Thermal resistance junction to ambient	R <sub>θJA</sub>		400		°C/W
Junction temperature	T <sub>J</sub>		125		°C
Storage temperature	T <sub>STG</sub>		-55~+150		°C


### ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V <sub>(BR)</sub>	I <sub>R</sub> = 1mA B5817WS B5818WS B5819WS	20 30 40		V
Reverse voltage leakage current	I <sub>R</sub>	V <sub>R</sub> =20V V <sub>R</sub> =30V V <sub>R</sub> =40V B5817WS B5818WS B5819WS		1	mA
Forward voltage	V <sub>F</sub>	B5817WS I <sub>F</sub> =1A I <sub>F</sub> =3A B5818WS I <sub>F</sub> =1A I <sub>F</sub> =3A B5819WS I <sub>F</sub> =1A I <sub>F</sub> =3A		0.45 0.75 0.55 0.875 0.6 0.9	V
Diode capacitance	C <sub>D</sub>	V <sub>R</sub> =4V, f=1MHz		120	pF

## Typical Characteristics

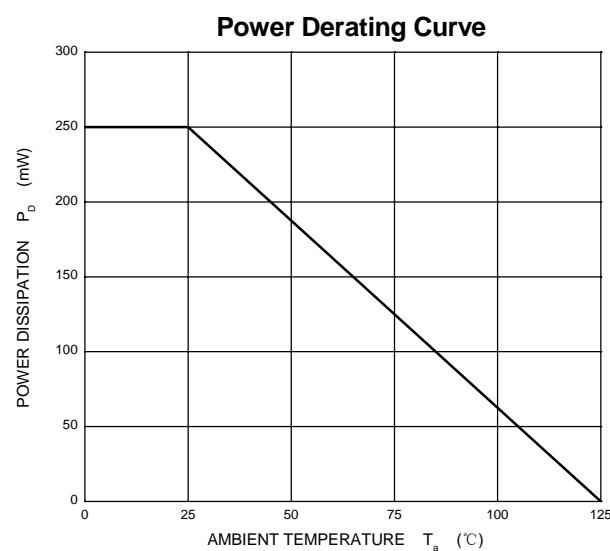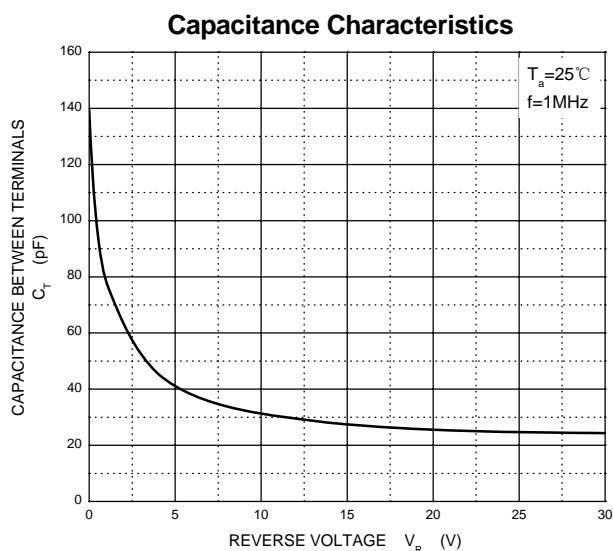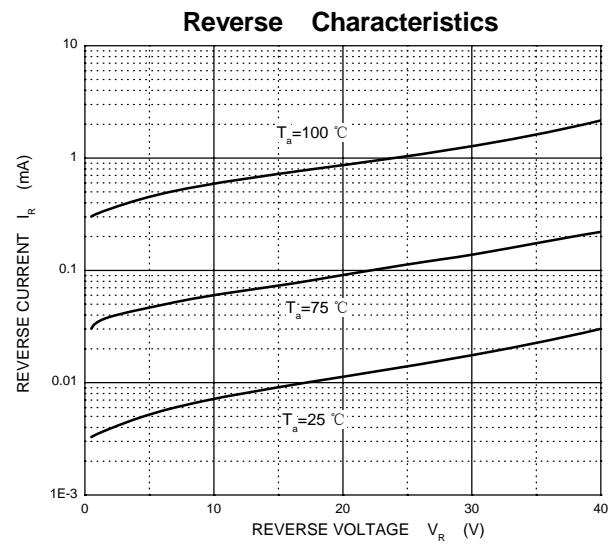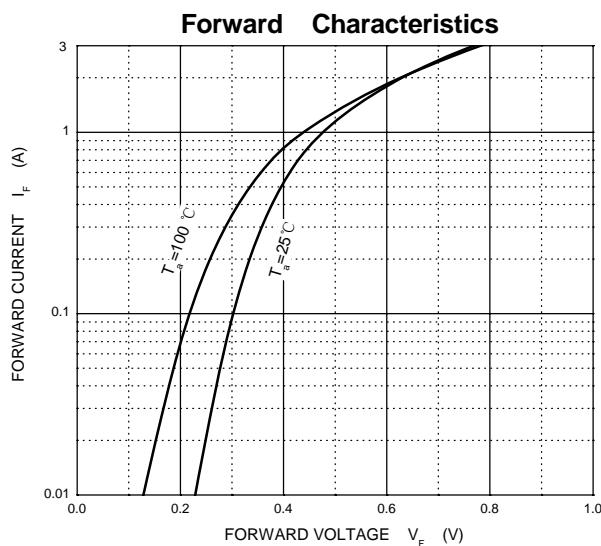


## SOD-323 Package Outline Dimensions

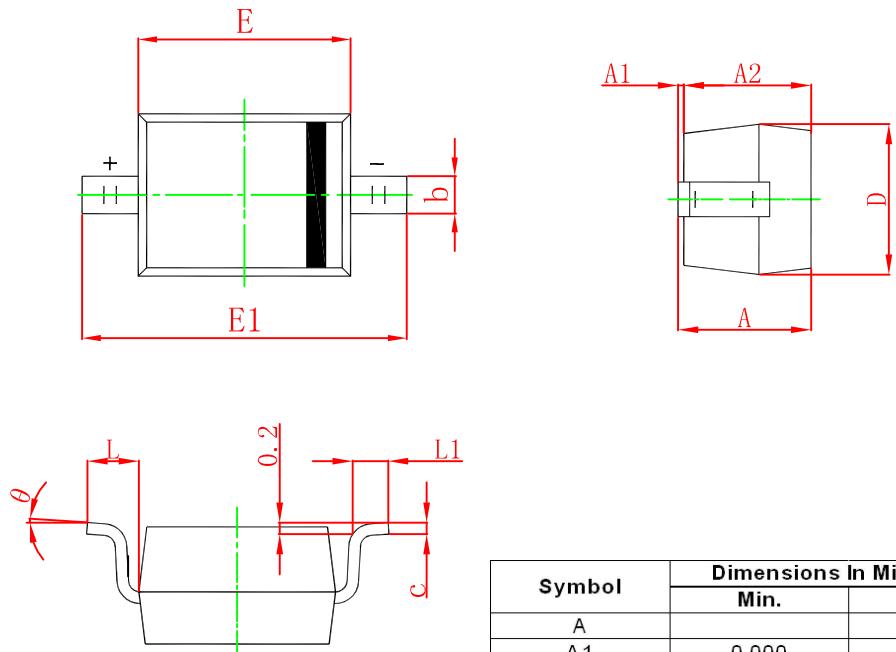

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A		1.000		0.039
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.031	0.035
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.550	2.750	0.100	0.108
L	0.475 REF.		0.019 REF.	
L1	0.250	0.400	0.010	0.016
θ	0°	8°	0°	8°

## SOD-323 Suggested Pad Layout

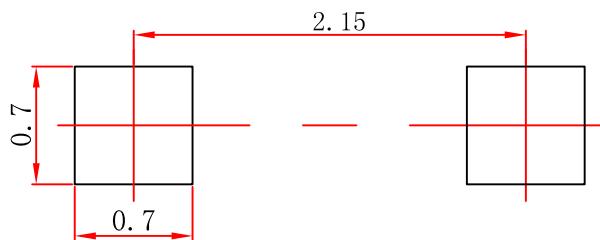

## Note:

1. Controlling dimension:in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.