

## TO-92 Encapsulate Three-terminal Voltage Regulators

## FEATURES

## Maximum Output current

 $I_{OM}$ : 0.1 A

## Output voltage

 $V_o$ : 6 V

## Continuous total dissipation


 $P_D$ : 0.625W

## TO-92

1.OUT

2.GND

3.IN




## ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	$V_I$	30	mA
Operating Junction Temperature Range	$T_{OPR}$	0d+1 $\circ$ E	$\circ$ C
Storage Temperature Range	$T_{STG}$	-55d+150	$\circ$ C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_i=11V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified )

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	$V_o$	25 $\circ$ C	5.75	6.0	6.25	V
		8V $\leq$ $V_o$ $\leq$ 20V, $I_o=1mA-40mA$	5.7	6.0	6.3	V
		$I_o=1mA-70mA$	5.7	6.0	6.3	V
Load Regulation	$\Delta V_o$	$I_o=1mA-100mA$	25 $\circ$ C	16	80	mV
		$I_o=1mA-40mA$	25 $\circ$ C	9	40	mV
Line regulation	$\Delta V_o$	8V $\leq$ $V_o$ $\leq$ 20V	25 $\circ$ C	35	175	mV
		9V $\leq$ $V_o$ $\leq$ 20V	25 $\circ$ C	29	125	mV
Quiescent Current	$I_q$		25 $\circ$ C	3.9	6.0	mA
Quiescent Current Change	$\Delta I_q$	9V $\leq$ $V_o$ $\leq$ 20V	0-125 $\circ$ C		1.5	mA
	$\Delta I_q$	1mA $\leq$ $I_o$ $\leq$ 40mA	0-125 $\circ$ C		0.1	mA
Output Noise Voltage	$V_N$	10Hz $\leq$ f $\leq$ 100KHz	25 $\circ$ C	46		$\mu$ V
Ripple Rejection	RR	9V $\leq$ $V_o$ $\leq$ 19V, f=120Hz	0-125 $\circ$ C	40	48	dB
Dropout Voltage	$V_d$		25 $\circ$ C	1.7		V

## TYPICAL APPLICATION

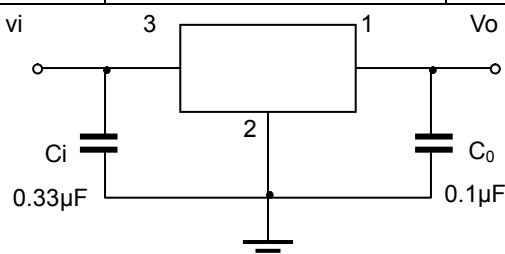

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.