


Three-Terminal Low Current Positive Voltage Regulators

FEATURES

- Wide range of available, fixed output voltage.
- Low cost.
- Internal short-circuit current limiting.
- Internal thermal overload protection.
- No external components required.
- Complementary negative regulators offered (SL79LXX series).

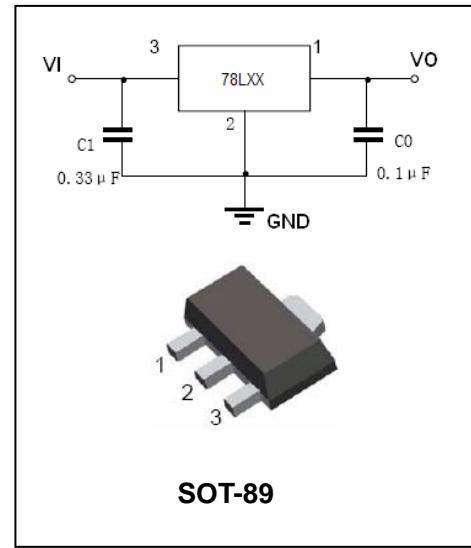

APPLICATIONS

- Three-terminal positive voltage regulator.

ORDERING INFORMATION

Type No.	Marking	Package Code
SL78LXX	78LXX	SOT-89

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input voltage(3.3V-9V) (10V-15V) (18V-24V)	30 35 40	V
I_{CM}	Maximum output current	100	mA
P_D	Power dissipation	500	mW
T_{OPR}	Operating junction temperature	0 to +125	°C
T_j, T_{stg}	Storage temperature range	-40 to +150	°C

ELECTRICAL CHARACTERISTICS

(V_{IN}=10V,I_O=40mA,0°C < T_j < 125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L33			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C 5.3V≤V _i ≤20V,I _O =1mA-40mA V ₁ =8.3V,I _O =1mA-70mA	3.168 3.135 3.135	3.3	3.432 3.465 3.465	V
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA T _j =25°C, I _O =1mA-40mA			60 30	mV
Line regulation	Reg _{line}	5.3V≤V _i ≤20V, T _j =25°C 6.3V≤V _i ≤20V, T _j =25°C			150 100	mV
Input Bias Current	I _{IB}	T _j =25°C T _j =125°C			6.0 5.5	mA
Input Bias Current Change	△I _{IB}	6.3V≤V _i ≤20V 1mA≤I _O ≤40mA			1.5 0.1	mA
Output noise voltage	V _N	10Hz ≤f≤100KHz		40		µV
Ripple rejection	RR	I _O =40mA,6.3V≤V _i ≤16.3V f=120Hz,T _j =25°C	41	49		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=10V,I_O=40mA,0°C < T_j < 125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L05			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C 7V≤V _i ≤20V,I _O =1mA-40mA V ₁ =10V,I _O =1mA-70mA	4.8 4.75 4.75	5.0	5.2 5.25 5.25	V
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA T _j =25°C, I _O =1mA-40mA		11 5	60 30	mV
Line regulation	Reg _{line}	7V≤V _i ≤20V, T _j =25°C 8V≤V _i ≤20V, T _j =25°C		55 45	150 100	mV
Input Bias Current	I _{IB}	T _j =25°C T _j =125°C		3.8	6.0 5.5	mA
Input Bias Current Change	△I _{IB}	8V≤V _i ≤20V 1mA≤I _O ≤40mA			1.5 0.1	mA
Output noise voltage	V _N	10Hz ≤f≤100KHz		40		µV
Ripple rejection	RR	I _O =40mA,8V≤V _i ≤18V,f=120Hz ,T _j =25°C	41	49		dB
Dropout voltage	V _I -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=12V,I_O=40mA,0°C< T_j<125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L06			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	5.75	6.0	6.25	V
		V ₁ =8.5V-20V,I _O =1mA-40mA	5.7		6.3	
		V ₁ =8.5V,I _O =1mA-70mA	5.7		6.3	
Load regulation	Reg _{load}	T _j =25°C , I _O =1mA-100mA		12.8	80	mV
		T _j =25°C , I _O =1mA-70mA		5.8	40	
Line regulation	Reg _{line}	8.5V≤V _i ≤20V, T _j =25°C		64	175	mV
		9V≤V _i ≤20V, T _j =25°C		54	125	
Input Bias Current	I _{IB}	T _j =25°C , V _{IN} =12V,I _O =40mA			5.5	mA
		T _j =125°C , V _{IN} =12V,I _O =40mA		3.9	6.0	
Input Bias Current Change	△I _{IB}	9V≤V _i ≤20V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	10Hz ≤f≤100KHz		40		μV/V _O
Ripple rejection	RR	I _O =40mA,10V≤V _i ≤20V,f=120Hz, T _j =25°C	40	46		dB
Dropout voltage	V _D	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_i=14V,I_O=40mA,0°C< T_j<125°C,C_I=0.33μF,C_O=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L08			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	7.7	8.0	8.3	V
		10.5V≤V _i ≤23V,I _O =1mA-40mA	7.6		8.4	
		V ₁ =14V,I _O =1mA-70mA	7.6		8.4	
Load regulation	Reg _{load}	T _j =25°C , I _O =1mA-100mA		15	80	mV
		T _j =25°C , I _O =1mA-40mA		8.0	40	
Line regulation	Reg _{line}	10.5V≤V _i ≤23V, T _j =25°C		20	175	mV
		11V≤V _i ≤23V, T _j =25°C		12	125	
Input Bias Current	I _{IB}	T _j =25°C		3	6.0	mA
		T _j =125°C			5.5	
Input Bias Current Change	△I _{IB}	11V≤V _i ≤23V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	T _A =25°C,10Hz≤f≤100KHz		60		μV
Ripple rejection	RR	I _O =40mA,12V≤V _i ≤23V,f=120Hz, T _j =25°C	37	57		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_i=15V,I_O=40mA,0°C< T_j<125°C,C_I=0.33μF,C_O=0.1uF,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L09			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	8.6	9.0	9.4	V
		V _i =11.5V-24V,I _O =1mA-40mA	8.5		9.5	
		V _i =15V,I _O =1mA-70mA	8.5		9.5	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		15	90	mV
		T _j =25°C, I _O =1mA-40mA		8.0	40	
Line regulation	Reg _{line}	11.5V≤V _i ≤24V, T _j =25°C		20	175	mV
		12V≤V _i ≤24V, T _j =25°C		12	125	
Input Bias Current	I _{IB}	T _j =25°C		3.0	6.0	mA
		T _j =125°C			5.5	
Input Bias Current Change	△I _{IB}	11V≤V _i ≤23V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	T _A =25°C,10Hz≤f≤100KHz		60		μV
Ripple rejection	RR	I _O =40mA,13V≤V _i ≤24V,f=120Hz,T _j =25°C	37	57		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IN}=16V,I_O=40350mA,C_{IN}=0.33μF,C_O=0.1μf,T_j=0 to 125°C ,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L10			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _J =25°C	9.6	10	10.4	V
Load regulation(Note1)	△Reg _{load}	I _O = 1 to 100mA, T _j = 25°C	-	17	90	mV
		I _O = 1 to 40mA, T _j = 25°C	-	9	45	mV
Line regulation(Note1)	△Reg _{line}	V _I = 12.5 to 25V, T _j = 25°C	-	100	210	mV
		V _I = 13 to 25V, T _j = 25°C	-	90	160	mV
Input Bias Current	I _{IB}	T _j = 25°C	-	2.0	3.0	mA
Input Bias Current Change	△I _{IB}	V _I = 13 to 25V, T _j = 25°C	-	-	1.0	mA
Output Noise Voltage	V _N	10Hz≤f≤100KHz	-	70	-	μV
Ripple Rejection	RR	V _I = 13to23V, I _O = 40mA, f = 120Hz	42	52	-	dB
Dropout Voltage	V _D	T _J =25°C	-	1.7	-	V
Dropout voltage	V _I -V _O	I _O = 5mA, T _j = 0 to 125°C	-	0.9	-	mV/°C

ELECTRICAL CHARACTERISTICS

(V_i=19V, I_O=40mA, 0°C < T_j < 125°C, C_i=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L12			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	11.5	12	12.5	V
		V _i =14.5V-27V, I _O =1mA-40mA	11.4		12.6	
		V _i =19V, I _O =1mA-70mA	11.4		12.6	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		20	100	mV
		T _j =25°C, I _O =1mA-40mA		10	50	
Line regulation	Reg _{line}	14.5V≤V _i ≤27V, T _j =25°C		120	250	mV
		16V≤V _i ≤27V, T _j =25°C		100	200	
Input Bias Current	I _{IB}	T _j =25°C		4.2	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	16V≤V _i ≤27V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output Noise Voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		80		μV
Ripple rejection	RR	I _O =40mA, 15V≤V _i ≤25V, f=120Hz, T _j =25°C	37	42		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IS}=23V, I_O=40mA, 0°C < T_j < 125°C, C_i=0.33μF, C_O=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L15			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	14.4	15	15.6	V
		V _i =17.5V-30V, I _O =1mA-40mA	14.25		15.75	
		V _i =23V, I _O =1mA-70mA	14.25		15.75	
Load regulation	△Reg _{load}	T _j =25°C, I _O =1mA-100mA		25	150	mV
		T _j =25°C, I _O =1mA-40mA		12	75	
Line regulation	△Reg _{line}	17.5V≤V _i ≤30V, T _j =25°C		130	300	mV
		20V≤V _i ≤30V, T _j =25°C		110	250	
Input Bias Current	I _{IB}	T _j =25°C		4.4	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	20V≤V _i ≤30V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	10Hz≤f≤100KHz, T _A =25°C		90		μV
Ripple rejection	RR	I _O =40mA, 18.5V≤V _i ≤28.5V, f=120Hz, T _j =25°C	34	39		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_i=27V,I_O=40mA,0°C< T_j<125°C,C_I=0.33μF,C_O=0.1μf,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L18			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	17.3	18	18.7	V
		V _i =20.7V-33V, I _O =1mA-40mA	17.1		18.9	
		V _i =27V, I _O =1mA-70mA	17.1		18.9	
Load regulation	Reg _{load}	T _j =25°C, I _O =1mA-100mA		30	170	mV
		T _j =25°C, I _O =1mA-40mA		15	85	
Line regulation	Reg _{line}	20.7V≤V _i ≤33V, T _j =25°C		45	325	mV
		21V≤V _i ≤33V, T _j =25°C		35	275	
Input Bias Current	I _{IB}	T _j =25°C		3.1	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	21V≤V _i ≤33V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output Noise Voltage	V _N	10Hz≤f≤100KHz,T _A =25°C		150		μV
Ripple rejection	RR	I _O =40mA,23V≤V _i ≤33V,f=120Hz, T _j =25°C	33	48		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

ELECTRICAL CHARACTERISTICS

(V_{IS}=33V,I_O=40mA,0°C< T_j<125°C,C_I=0.33μF,C_O=0.1μf,unless otherwise specified)

Parameter	Symbol	Test conditions	SL78L24			UNIT
			MIN	TYP	MAX	
Output voltage	V _O	T _j =25°C	23	24	25	V
		V _i =27V-38V,I _O =1mA-40mA	22.8		25.2	
		V _i =27V-33V,I _O =1mA-70mA	22.8		25.2	
Load regulation	△Reg _{load}	T _j =25°C, I _O =1mA-100mA		40	200	mV
		T _j =25°C, I _O =1mA-40mA		20	100	
Line regulation	△Reg _{line}	28V≤V _i ≤80V, T _j =25°C		50	300	mV
		27V≤V _i ≤38V, T _j =25°C		60	350	
Input Bias Current	I _{IB}	T _j =25°C		3.1	6.5	mA
		T _j =125°C			6.0	
Input Bias Current Change	△I _{IB}	28V≤V _i ≤38V			1.5	mA
		1mA≤I _O ≤40mA			0.1	
Output noise voltage	V _N	10Hz≤f≤100KHz,T _A =25°C		200		μV
Ripple rejection	RR	I _O =40mA,29V≤V _i ≤35V, f=120Hz, T _j =25°C	31	45		dB
Dropout voltage	V _i -V _O	T _j =25°C		1.7		V

TYPICAL CHARACTERISTICS @ $T_a = 25^\circ\text{C}$ unless otherwise specified

Figure 1. Dropout Characteristics

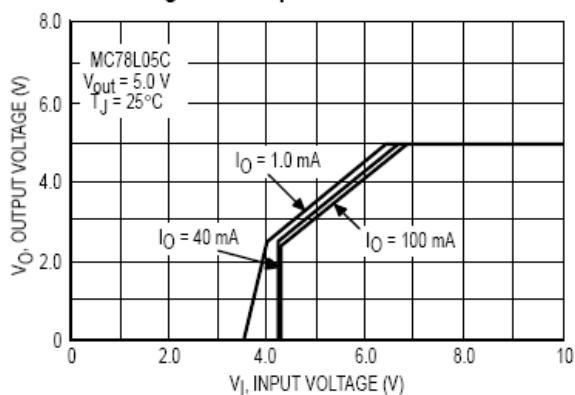


Figure 3. Input Bias Current versus Ambient Temperature

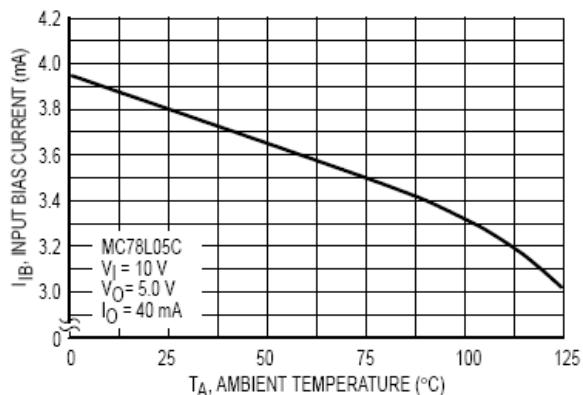


Figure 5. Maximum Average Power Dissipation versus Ambient Temperature – TO-92 Type Package

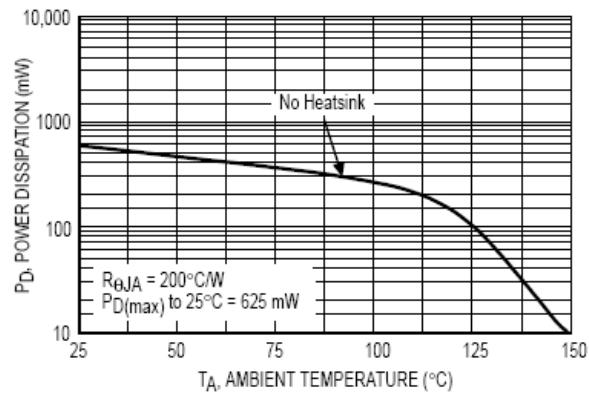


Figure 2. Dropout Voltage versus Junction Temperature

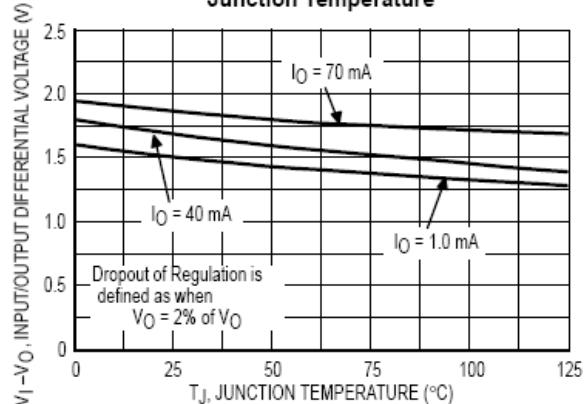


Figure 4. Input Bias Current versus Input Voltage


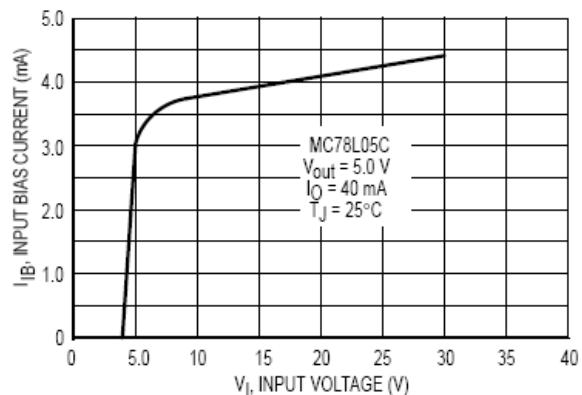



Figure 6. SOP-8 Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

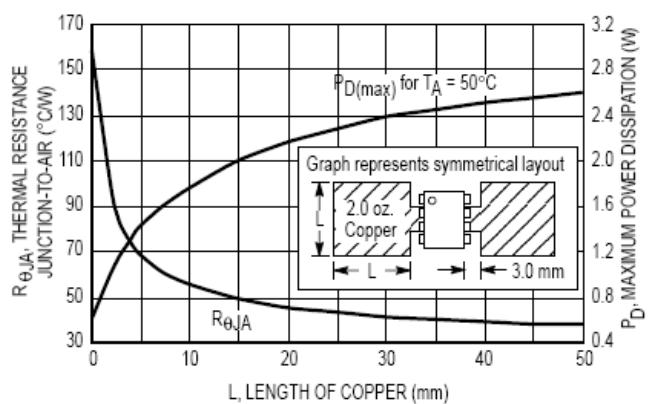

PACKAGE OUTLINE

Plastic surface mounted package


SOT-89

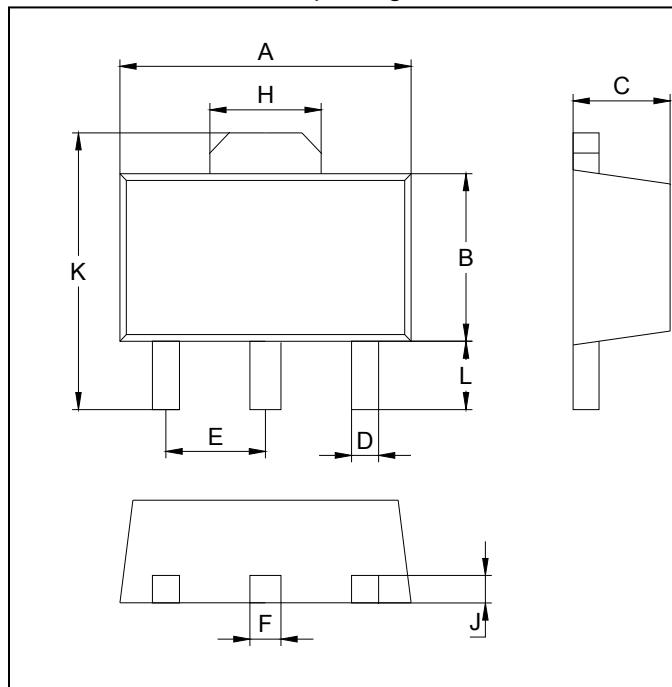

SOT-89		
Dim	Min	Max
A	4.30	4.70
B	2.25	2.65
C	1.50 Typical	
D	0.40 Typical	
E	1.40	1.60
F	0.48 Typical	
H	1.60	1.80
J	0.40 Typical	
L	0.90	1.10
K	3.95	4.35

All Dimensions in mm

SOLDERING FOOTPRINT

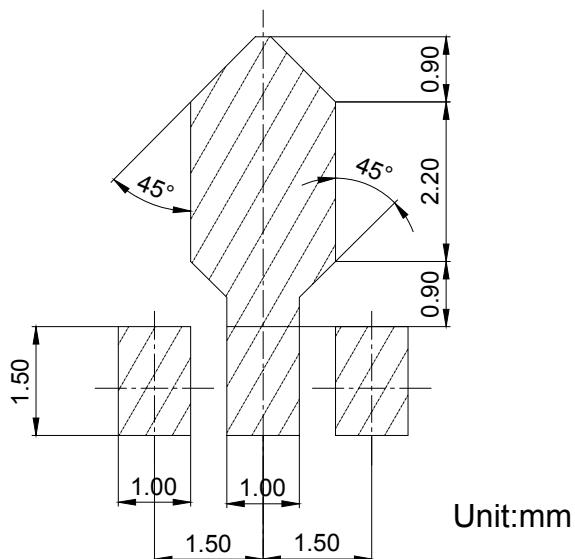

PACKAGE INFORMATION

Device	Package	Shipping
SL78LXX	SOT-89	1000/Tape&Reel