

## 1.0A Surface Mount Super Fast Rectifier

### Features

- Low profile surface mounted package
- Glass passivated junction
- Ultra fast recovery time for high efficiency
- Plastic package has underwriters laboratory flammability classification 94V-0
- High temperature soldering: 250 °C /10 seconds at terminals
- RoHS compliant



SMA

### Maximum Ratings ( $T_{Ambient}=25^{\circ}\text{C}$ unless noted)

Symbol	Description	ES1A	ES1B	ES1D	ES1F	ES1G	ES1J	ES1K	Unit	Conditions
<b>V<sub>RRM</sub></b>	Maximum Repetitive Peak Reverse Voltage	50	100	200	300	400	600	800	V	
<b>V<sub>RMS</sub></b>	Maximum RMS Voltage	35	70	140	210	280	420	560	V	
<b>V<sub>DC</sub></b>	Maximum DC Blocking Voltage	50	100	200	300	400	600	800	V	
<b>I<sub>AV</sub></b>	Maximum Average Forward Rectified Current	1.0					A		$T_L=110^{\circ}\text{C}$	
<b>I<sub>FSM</sub></b>	Peak Forward Surge Current	30					25	A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	
<b>T<sub>J,T<sub>STG</sub></sub></b>	Operating Junction and Storage Temperature Range	-55 to 150					° C			

**Note:** Single phase half wave, 60 Hz, resistive or inductive load.

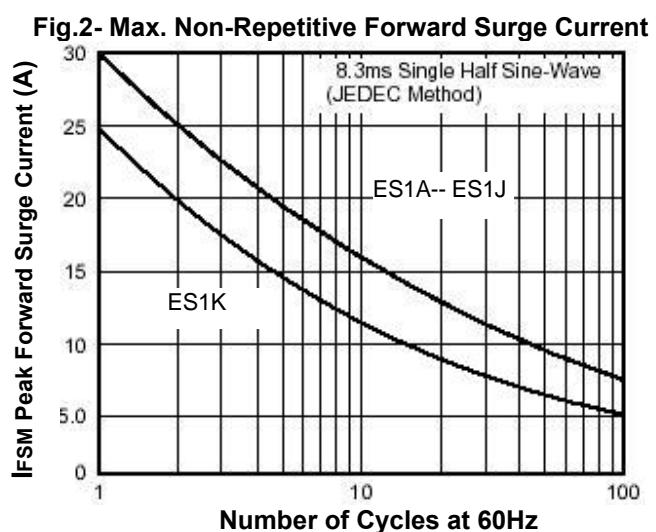
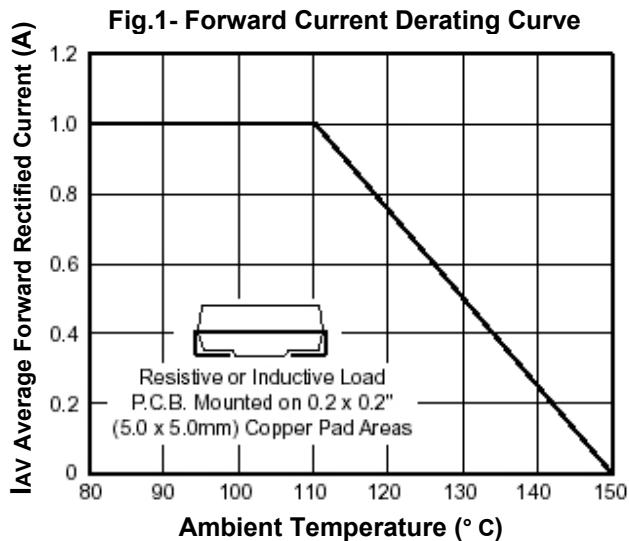
For capacitive load, derate current by 20%

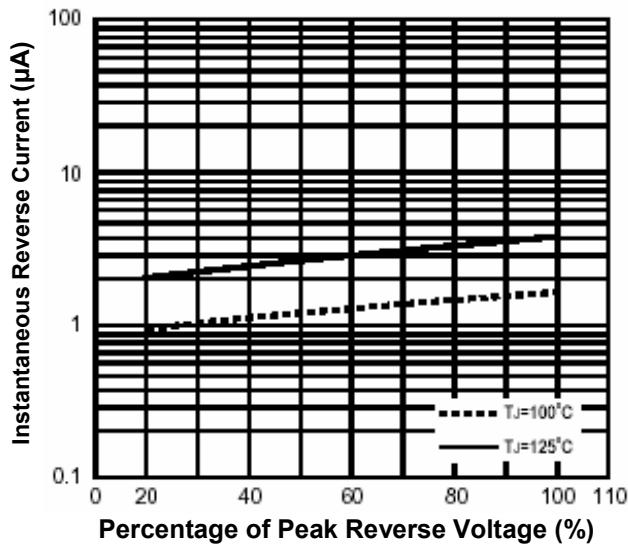
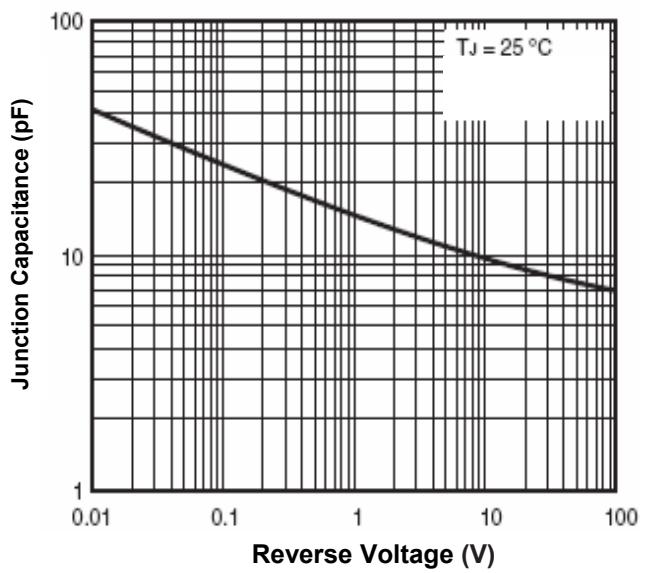
## Electrical Characteristics ( $T_{Ambient}=25^{\circ}\text{C}$ unless noted)

Symbol	Description	ES1A	ES1B	ES1D	ES1F	ES1G	ES1J	ES1K	Unit	Conditions
<b>V<sub>F</sub></b>	Maximum Instantaneous Forward Voltage	0.95			1.25		1.7	2.2	V	I <sub>F</sub> =1.0 A
<b>I<sub>R</sub></b>	Maximum DC Reverse Current at Rated DC Blocking Voltage	5						$\mu\text{A}$	$\text{TA}=25^{\circ}\text{C}$	
		50								$\text{TA}=125^{\circ}\text{C}$
<b>T<sub>rr</sub></b>	Typical Reverse Recovery Time	35						nS	$\text{I}_F=0.5\text{A}, \text{I}_R=1.0\text{A}, \text{I}_{rr}=0.25\text{A}$	
<b>C<sub>J</sub></b>	Typical Junction Capacitance	10						pF	Measured at 1.0 MHZ and Applied V <sub>r</sub> = 4.0 volts.	
<b>R<sub>θ-JA</sub></b>	Maximum Thermal Resistance	34						° C/W	Mounted on 0.2" x 0.2" (5mmx5mm) copper pad area	

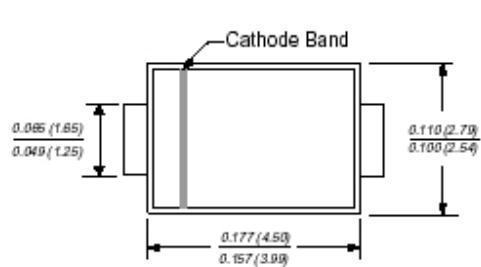
**Note:** Single phase half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

## Typical Characteristics Curves



**Fig.3- Typical Reverse Characteristics****Fig.4- Junction Capacitance**

### Dimensions in inch (mm)

**DO-214AC  
(SMA)**